


Install Instructions

Sliding Door Edge Pull



Scan for
Warranty

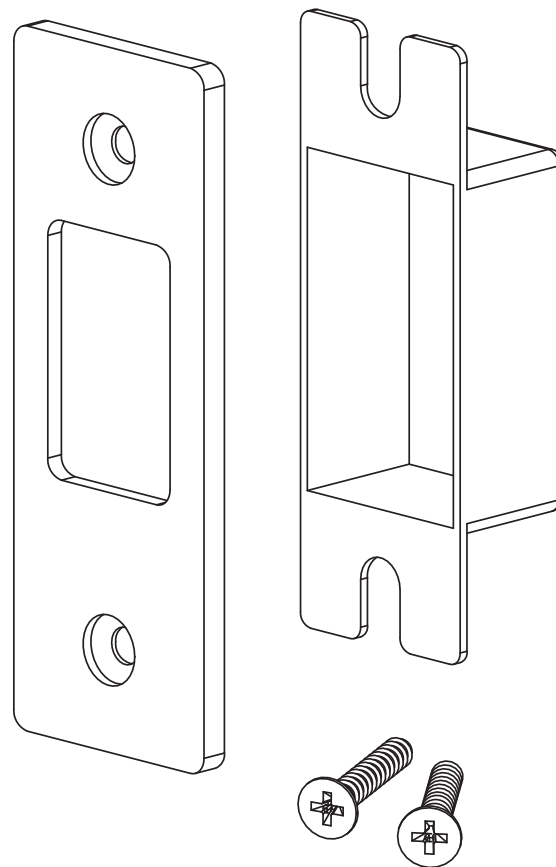

Scan for
Edge Pull
Drill Template



Scan for
Product &
Finish Care
Information



*Image used for illustration purposes only.

Contact Us Southern Design Group

Australia
14 - 16 Stepney Street,
Stepney, South Australia 5069
P: +61 (0)8 8362 1133
info@iver.com.au
iver-life.com/au

New Zealand
P: +64 (0)6 359 0008
info@iver.co.nz
iver-life.com/nz

SDG Trading Pty Ltd
trading as Iver
ACN 008 154 041 | ABN 18 008 154 041




9 343857 447538

COMP430


1. Marking the Door

- 1.1. Mark the edge of your door at the desired height of your edge pull.

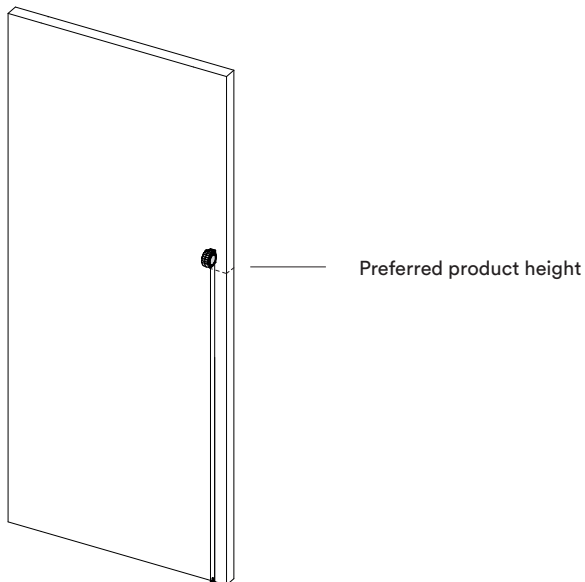


2. Preparing the Door

- 2.1. At the appropriate height, and as per the template create two W19mm x H47mm cavities in the door frame.

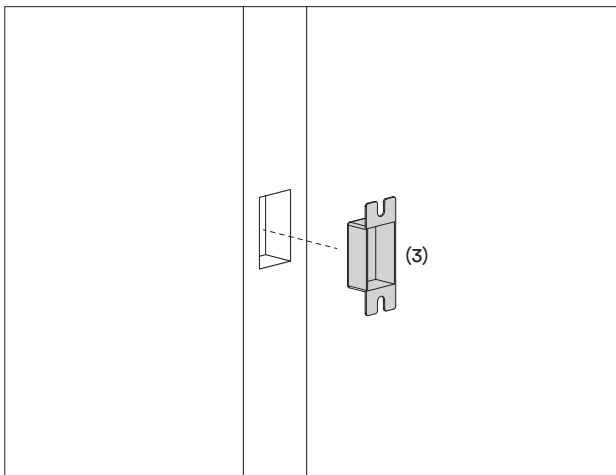


- 2.2. Remove dust and insert dust box.
- 2.3. Place edge pull over cavity and mark around the edges with a Stanley knife.

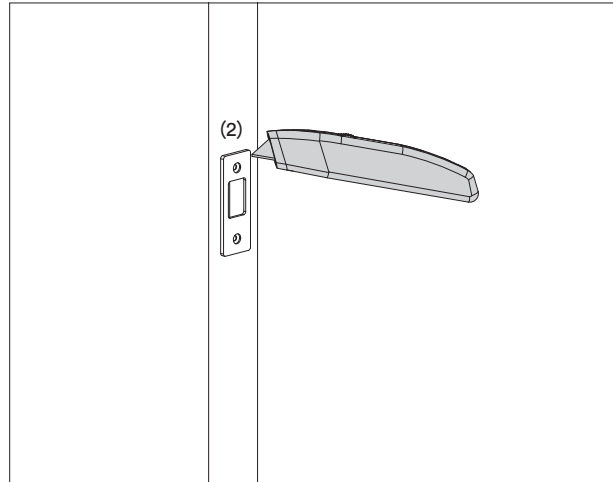

- 2.4. Using your preferred method create a 3mm recess to accommodate face plate.


3. Installing Edge Pull

- 3.1. Insert the edge pull face plate.

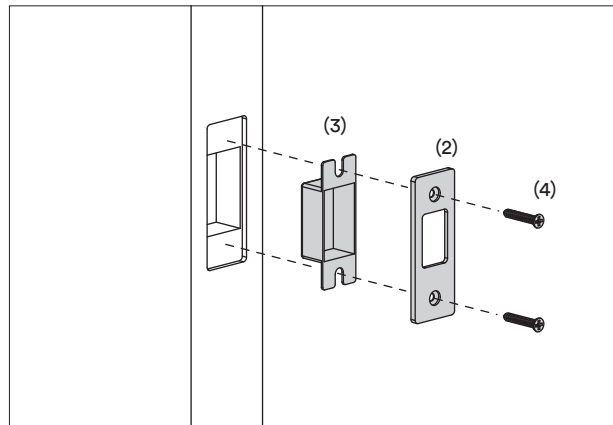


- 3.2. Drill two 2mm pilot holes for face plate screws at 6 and 12 o'clock and Install screws.
- 3.3. Tighten manually with a screwdriver.

Included:

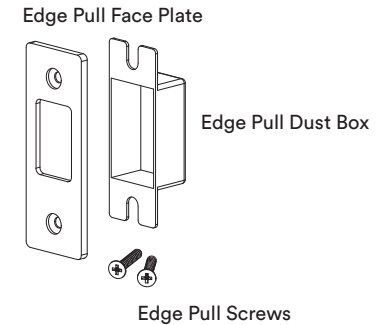

Not Included:

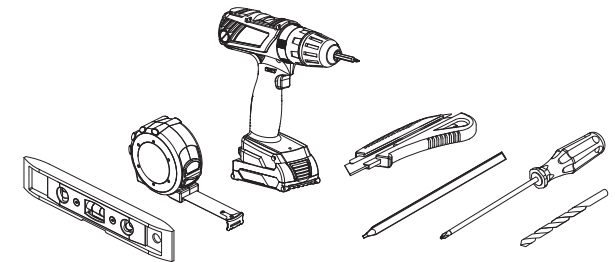

IMPORTANT:

Please install this door hardware in the following order to ensure its warranty is not voided.

1. Install the door hardware on raw / unfinished door using the instructions provided.
2. Remove door hardware and store safely. Do not place painters tape or masking tape over the product. The tape will damage the finish.
3. Paint / finish door.
4. Reinstall hardware.

